

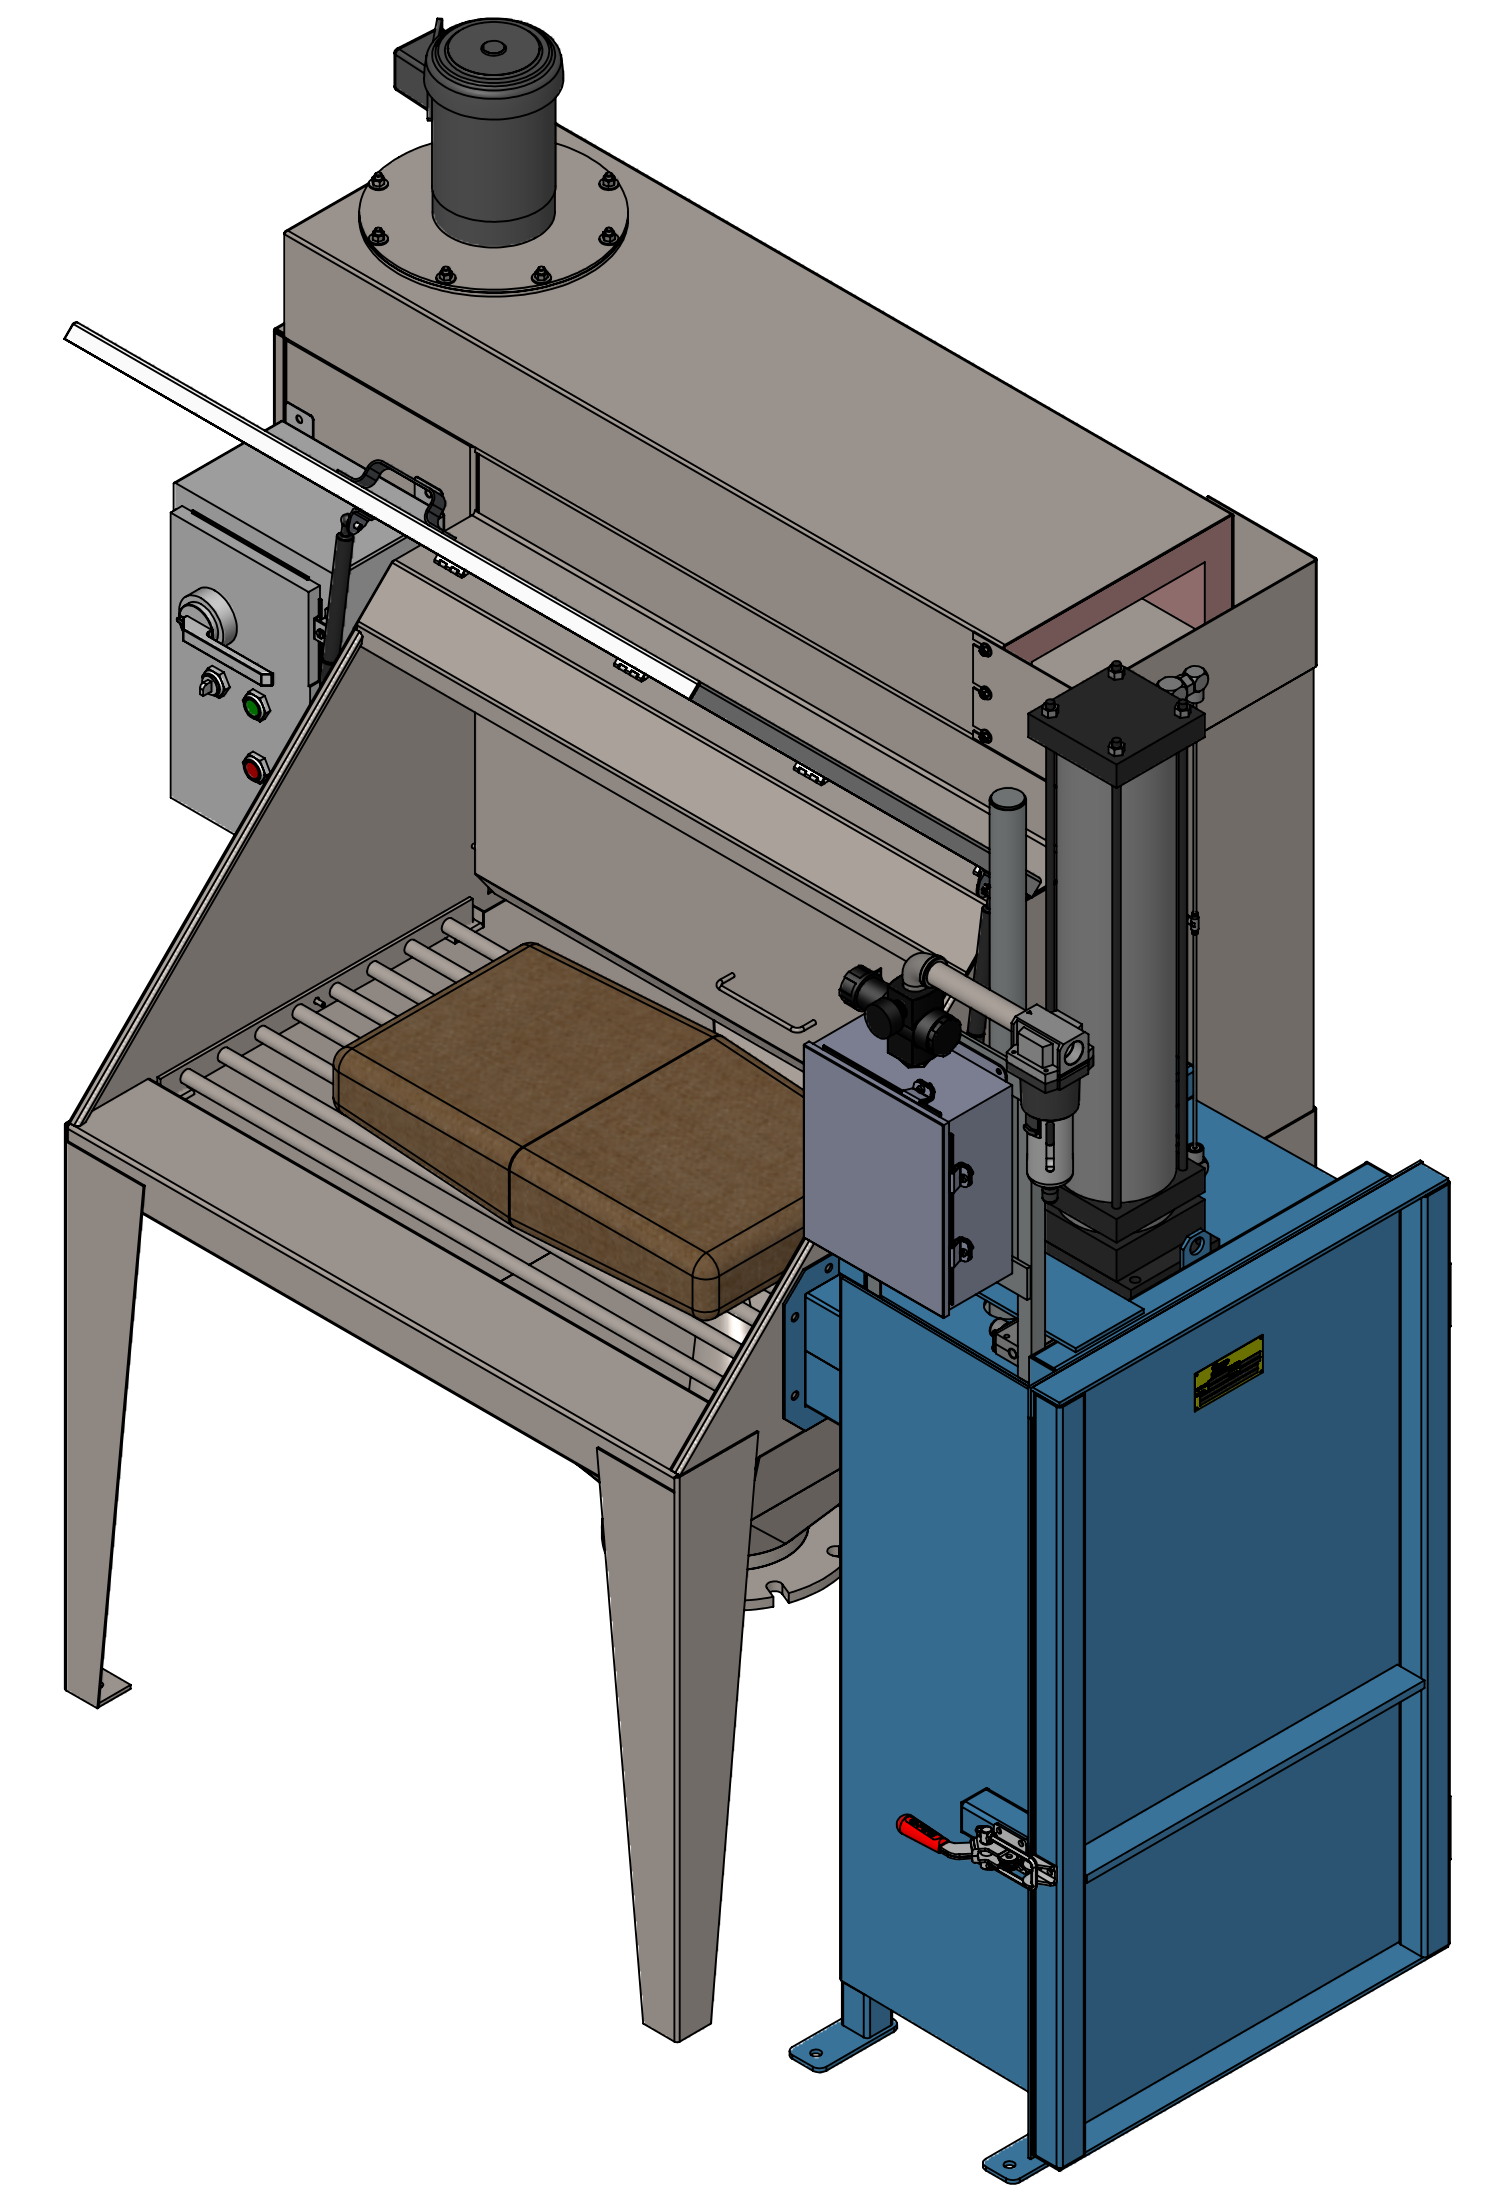


SIZE	A	B	C	D	E	F	G	EST. WEIGHT
16X24	80.44	30.44	50	18.38	35	30	14.25	1,000 LBS
24X32				26.75	43	37.50	22.25	1,400 LBS

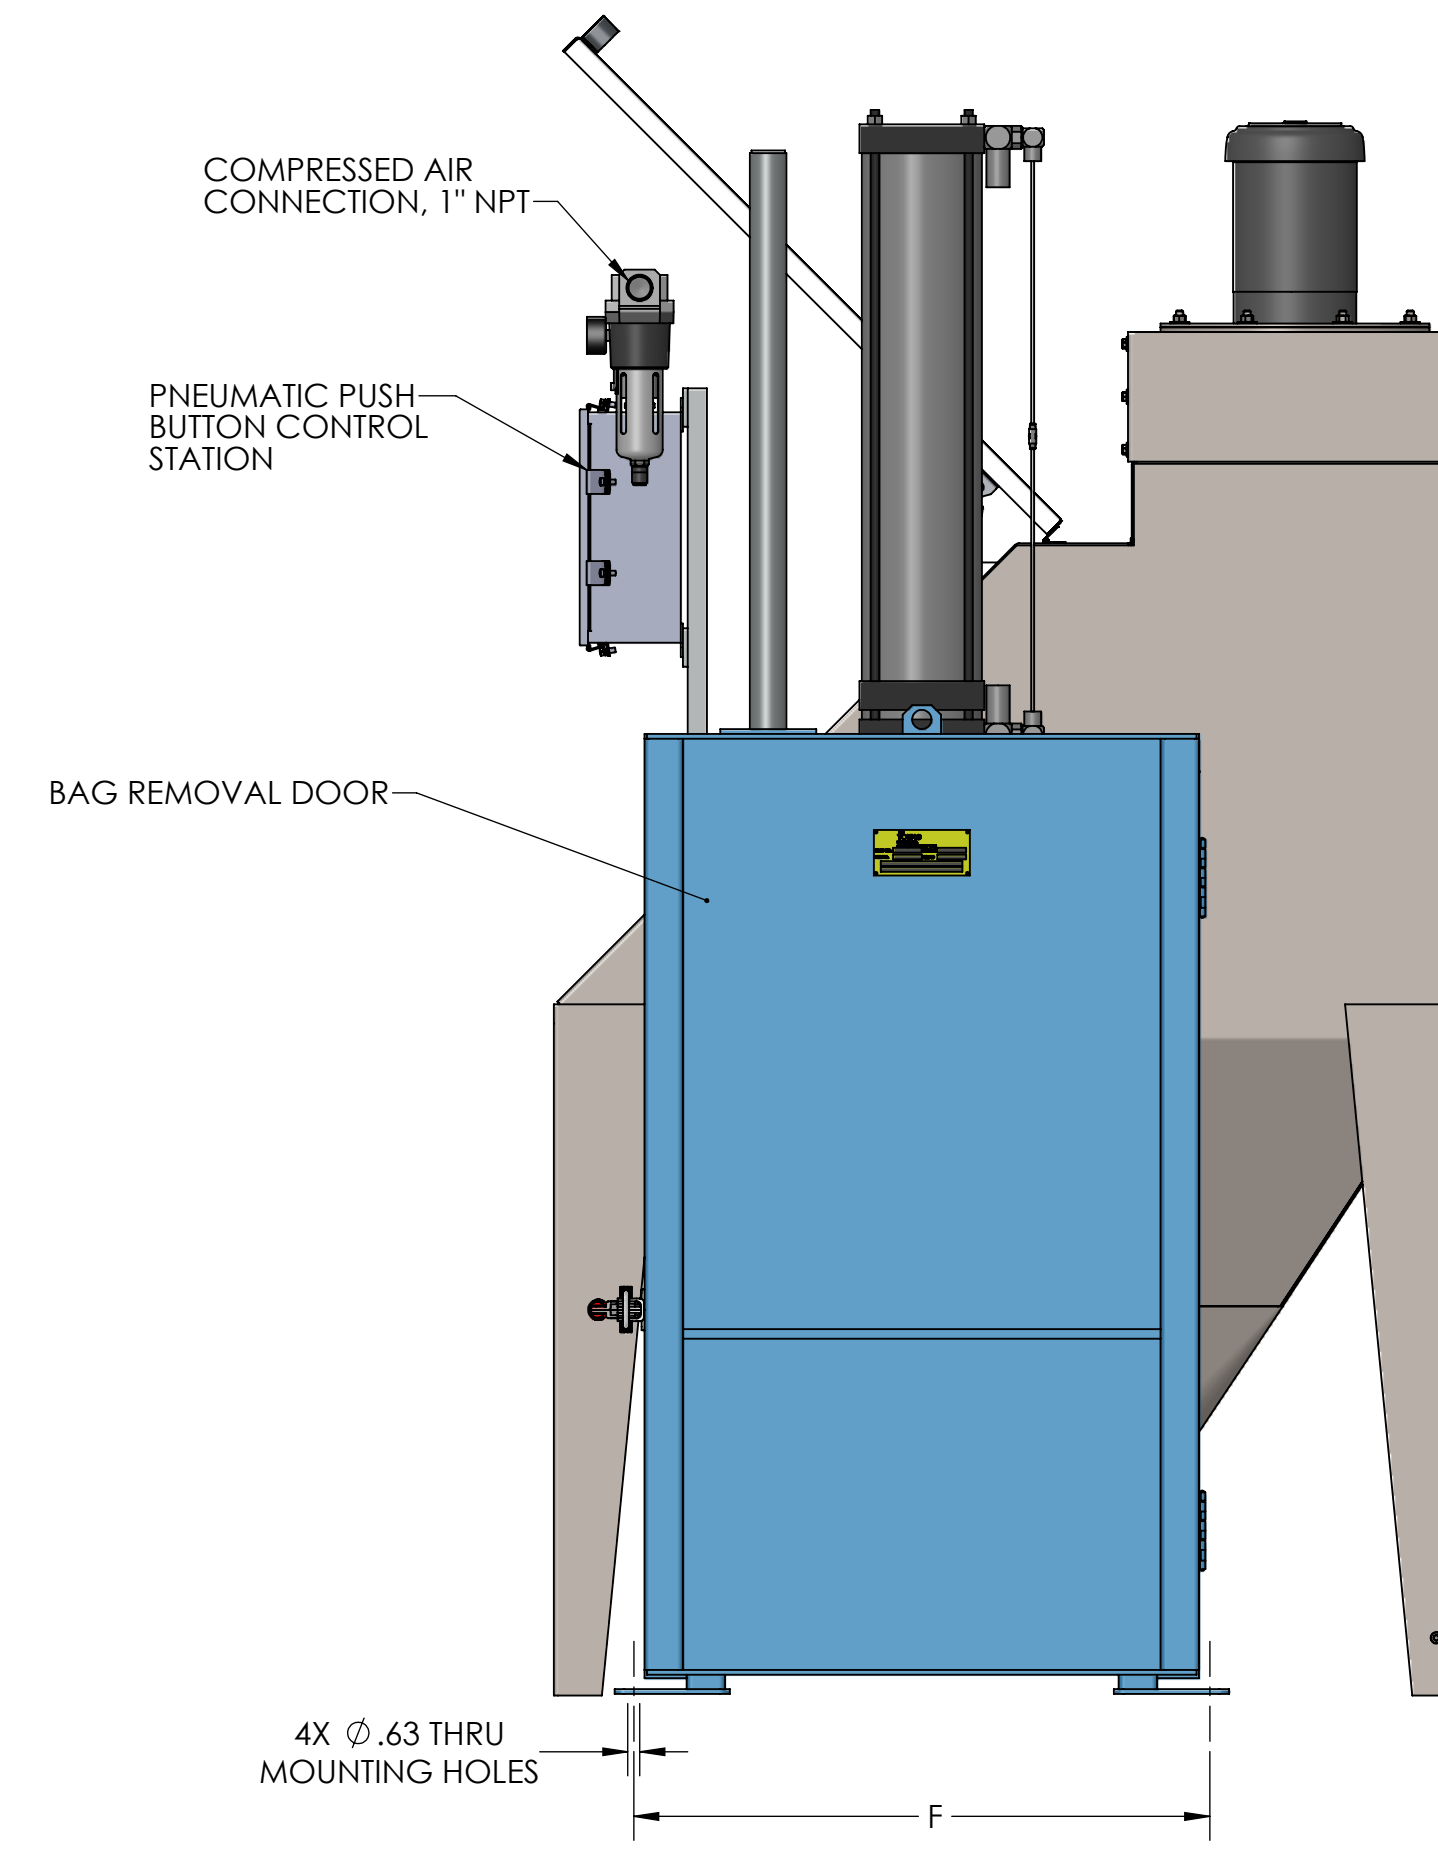

BAG DUMP STATION FOR REFERENCE

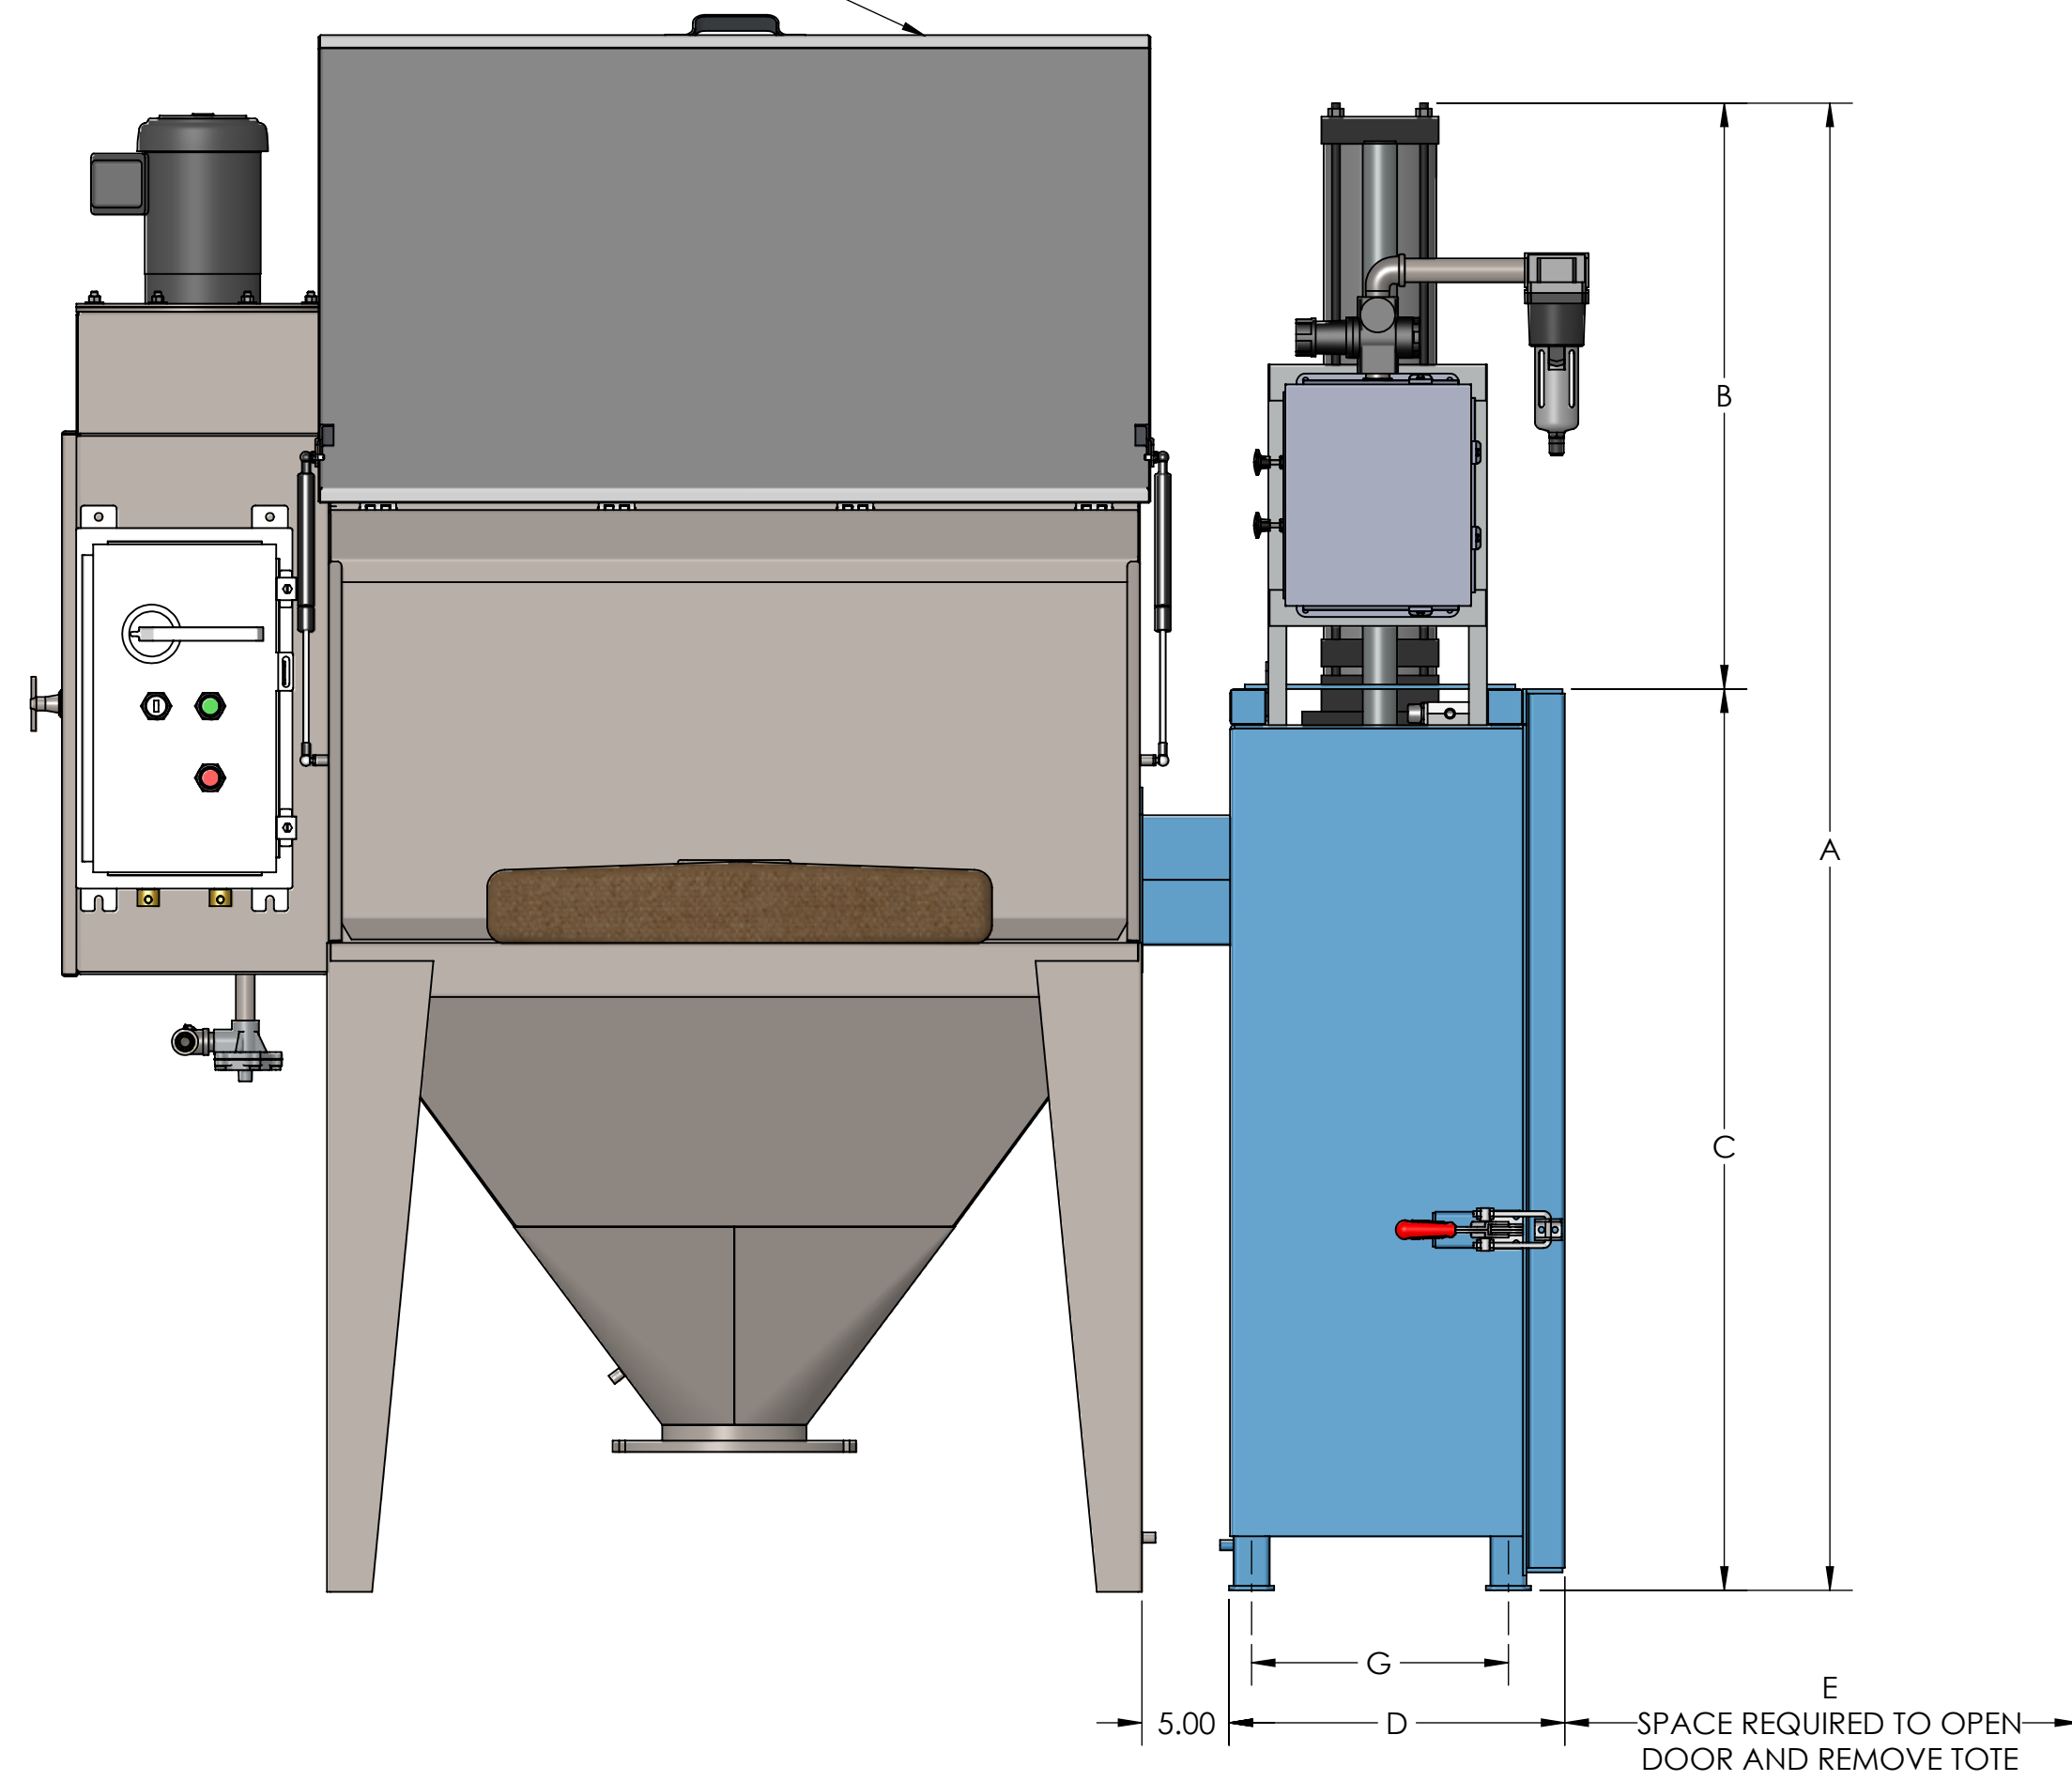

NOTES:

- BAG COMPACTOR CAN BE MOUNTED TO ANY SIZE BAG DUMP STATION WITH VENT CONNECTION, OR FILTER BAG DUMP STATION
- BAG COMPACTORS CAN BE MOUNTED TO EITHER THE RIGHT OR LEFT SIDE OF BAG DUMP STATION
- COMPACTOR EMPTY BAG ACCESS DOOR AND BAG DUMP STATION CHARGE DOOR ARE INTERLOCKED WITH PNEUMATIC CONTROLS SO THAT BOTH DOORS MUST BE CLOSED BEFORE COMPACTION CYCLE CAN START
- EMPTY BAG REMOVAL DOOR CAN BE HINGED ON RIGHT SIDE OR LEFT SIDE DEPENDING ON CUSTOMER PREFERENCE
- COMPACTOR IS TOTALLY PNEUMATICALLY OPERATED, REQUIRES 80-125 PSIG OF COMPRESSED AIR

REV. NO.	DESCRIPTION	DATE	BY
REVISIONS			
CUSTOMER:			
CUSTOMER PO NUMBER:			
YOUNG JOB NUMBER:			
TITLE			
YOUNG INDUSTRIES PNEUMATIC BAG COMPACTOR			
 <small>MUNICIPALITY, PENNSYLVANIA 17756 TELEPHONE: 570-546-3165</small>			
DRAWN BY: JPR		DATE: 01/14/25	
CHECKED BY:		SCALE=1:10	
DRAWING NUMBER		SHEET	REV:
D-21404-40		1 OF 1	00

GENERAL TOLERANCES
 UNLESS OTHERWISE SPECIFIED THE FOLLOWING SHALL APPLY
 MACHINING - .XX± .02 .XXX± .005 ANGLES - 30°
 SURFACE ROUGHNESS HEIGHT .63 MICRONS OR LESS
 FABRICATION - UNDER 6 6 TO 24 24 TO 40 OVER 40
 ± .06 ± .12 ± .19 ± .25
 UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
 UNLESS SPECIFIED DIMENSIONS & TOLERANCES INTERPRETED
 PER ASME Y14.5-2009

3RD